



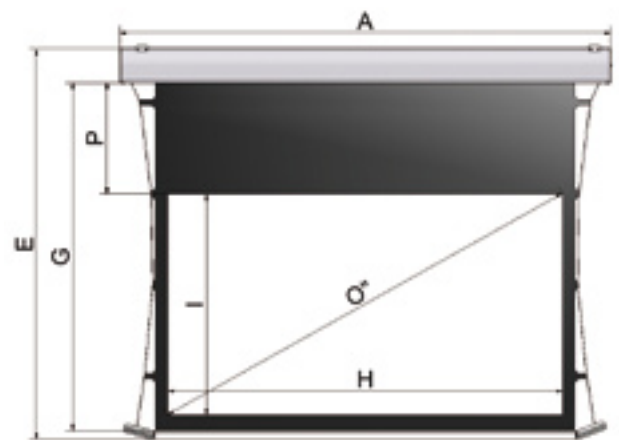

The research carried out by Adeo on tensioning systems has reached a new record, crossing the threshold of the 3.5 m base with the Alumid screen. Marked by the quality of its in-built roller and solidity of the entire structure, this screen can be used in the Tensio version. The CTS (Constant Tension System) provides constant self-tensioning through time, obtained through two counterweights hooked onto hinges at the ends of the screen's base, which tension the rigid cables threaded through the lateral eyelets. During screen rolling the eyelets remain outside the edge of the surface, thus avoiding the formation of annoying creases (see page 7).

A must for providing high quality projection even in large-scale environments and in the presence of a vast audience.



Create your own screen with the PSS:

- > **personalized dimensions:** width and height
- > **roller type:** standard motorized
- > **case:** available only with case
- > **case color:** available only in white
- > **projection surfaces:** VisionWhite, VisionWhitePro*, VisionGrey, VisionAcoustik and Vision MacroAcoustik only with black borders
- > **height of top:** from 10 to 60 cm
- > **projection surface drop:** front or rear
- > **side of command/motor:** right or left

Standard accessories:

- > kit with wall- or ceiling- quick mount brackets
- > unipolar selector switch

Optional accessories:


- > receiver and RF remote control for motorized screen (3 modalities: basic, automatic and compatible with domotic systems)
- > receiver and infrared remote control
- > bracket extensions for screens up to 60 cm

* Available for screens up to 406 cm base

| Format | Overall | | Surface | | Net surface | | Top standard | Max extra Top | Diagonal inches | Shipment sizes | Net weight | Gross weight |
|--------|---------|--------|---------|--------|-------------|--------|--------------|---------------|-----------------|----------------|------------|--------------|
| | width | height | width | height | width | height | | | | | | |
| | A | E | F | G | H | I | P | cm | O" | mm | kg | kg |
| 4:3 | 406 | 306 | 374 | 288 | 364 | 273 | 10 | 20 | 179 | 425X20X21 | 36 | 42 |
| | 456 | 343 | 424 | 326 | 414 | 311 | 10 | 20 | 204 | 475X20X21 | 41 | 47 |
| 16:9 | 406 | 237 | 374 | 220 | 364 | 205 | 10 | 60 | 164 | 425x20x21 | 35 | 41 |
| | 456 | 266 | 424 | 248 | 414 | 233 | 10 | 60 | 187 | 475X20X21 | 40 | 46 |



Standard formats



PSS formats



Surfaces Fireproof Certification

